

TEMPEST VOIP Phone Level A pangolin

BSPH8841C-TA


Key Features:

Designed for increased productivity in the workplace

Wideband audio

Compliant with NATO SDIP27/2 Level A

Compliant with EU IASG 7-03 Level A.

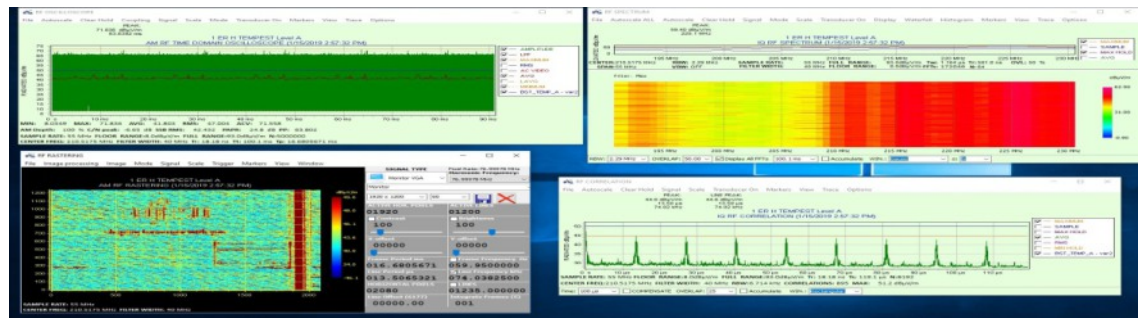

Solution/Benefits:

The BSPH8841C-TA, based on the Cisco Video Phone 8841, offers an easy-to-use interface and provides a traditional telephony-like user experience.

Ergonomic:

The BSPH8841C-TA combines an attractive new ergonomic design with wideband audio for crystal clear voice communications, "always-on" reliability, encrypted voice communications to enhance security, and access to a comprehensive suite of unified communication features from Cisco on-premises and hosted infrastructure platforms and third party hosted call control.

Modern Interface:

The BSPH8841C-TA offers four programmable line keys. You can configure keys to support either multiple directory numbers or call features such as speed dial. You can also boost productivity by handling multiple calls for each directory number, using the multicall-per-line feature.



TEHNICAL PARAMETERS

Brand

@pangolin

Product Specification

Audio codec	G.711 (A-law and μ -law), G.722, G.729ab
Data network connections	2 x LC multimode duplex fiber optic ports (1000BASE-SX)
Network Features	SIP, SDP, IPv4 and IPv6, UDP, DHCP, GARP, LLDP-MED DNS, TFTP, HTTPS, VLAN, RPT, RTCP, PPDP, CDP

Build and functionality	5-inch screen with 800 × 480 resolution, integrated color display; Handset Full numeric keypad (0-9, #, *) 4 programmable function keys, 10 programmable line keys Navigation/control button for accessing call history, recent calls, and phone settings Volume control button for adjusting call and ringer volume Housing color: charcoal gray Compatible with Cisco Call Control Center
-------------------------	---

Physical Dimensions (H x W x D)	229.1 x 257.34 x 40 mm
Weight (with handset)	1.17 kg
Operational temperature	0 to 40° C
Storage temperature	-10 to 60°C
Operating humidity	10 to 90%, non-condensing
Storage humidity	10 to 95%, non-condensing

Warranty	6 years
Licenses	Cisco Unified Communications Manager Express (A-FLEX-EP-CME) - 5 years Cisco Unified Communications Manager (A-FLEX-P-ENH) - 5 years

TEMPEST	NATO SDIP 27/2 Level A or EU IASG 7-03 Level A
---------	--



To ensure compliance with TEMPEST Level A security requirements, the device is designed and configured so that the external microphone and the external speaker activation function are disabled, while the external speaker is restricted exclusively to playing ringtones, without transmitting voice. This restriction — allowing the external speaker to play only ringtones, without voice transmission — is implemented by the network administrator at the CUCM central level.